


HIGH-SPEED DRYWALL SCREW S-LINE

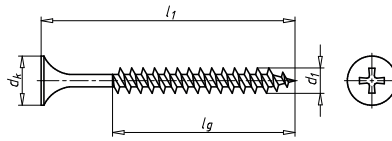


With double thread

- For screwing on metal substructures up to max. 1 mm
- Double-start thread with special needle tip
- Hardened steel, black phosphated finish
- Bugle head with PH 2 cross recess drive

Nominal diameter (d) mm	Length (l) mm	Thread length (l _g) mm	Head diameter (d _h) mm	Art. No.	P. Qty.
3.5	25	20	8.4	518913525	1000
3.5	35	30	8.4	518913535	1000

Compatible with ORSY® storage system

HIGH-SPEED DRYWALL SCREW PRO-LINE

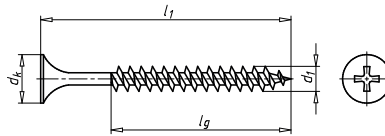


With double thread

- For screwing on metal substructures up to max. 1 mm
- Double-start thread with special needle tip
- Hardened steel, grey phosphated finish
- Bugle head with PH 2 cross recess drive

Nominal diameter (d) mm	Length (l) mm	Thread length (l _g) mm	Head diameter (d _h) mm	Art. No.	P. Qty.
3.5	25	20	8.4	518903525	1000
3.5	35	30	8.4	518903535	1000
3.5	45	40	8.4	518903545	500
3.9	55	50	8.4	518903955	500

Compatible with ORSY® storage system

HIGH-SPEED DRYWALL SCREW PRO-LINE

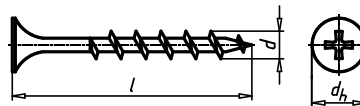


With coarse thread

- For screwing on to wooden substructures
- Extremely deep threads with sharp tip
- Hardened steel, grey phosphated finish
- Bugle head with PH 2 cross recess drive

Nominal diameter (d) mm	Length (l) mm	Thread length (l _g) mm	Head diameter (d _h) mm	Art. No.	P. Qty.
3.9	35	28	8.5	518939 35	1000
3.9	55	35	8.5	518939 55	500

Compatible with ORSY® storage system

HIGH-SPEED DRYWALL SCREW PRO-LINE

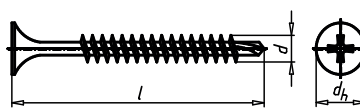

with drilling tip

- Self-tapping screw thread with ZEBRA® plus drilling tip
- For screwing gypsum plasterboard to metal profiles with a thickness of 0.75–2.25 mm
- Hardened steel, grey phosphated finish
- Bugle head with PH 2 cross recess drive

Nominal diameter (d) mm	Length (l) mm	Thread length (l _g) mm	Thread length with drill tip (b) mm	Head diameter (d _h) mm	Art. No.	P. Qty.
3.5	25	17	20	8.5	518935 25	1000
3.5	35	22	25	8.5	518935 35	1000

Compatible with ORSY® storage system